

Men's Pants – Measure your best fitting pants

Please note that the pants should be laid flat on a table or smooth surface for proper measurement.



1. HALF WAIST

1. Button up the pants.
2. Lay the garment out on a flat surface.
3. Measure from one side of the waist to the other.



2. HALF HIPS

1. Button up the pants.
2. Lay the garment out on a flat surface. Take care to pull any wrinkles and fullness from the back panels.
3. Measure the distance between the two hip points "C" & "D" as shown by image on the left.



3. FRONT RISE

1. Button up the pants.
2. Lay the garment out on a flat surface. Take care to pull any wrinkles and fullness from the back panel.
3. Measure from the crotch seam - point "K" as shown in the left image (the point where the inseams meet) to the top of the waistband (point "L").



4. BACK RISE

1. Button up the pants.
2. Lay the garment out on a flat surface. Take care to pull any wrinkles and fullness from the back panel.
3. Measure from the crotch seam- point "K" in the image on the left (the point where the inseams meet) to the top of the waistband (point "M").



5. INSEAM

1. Button up the pants.
2. Lay the garment out on a flat surface.
3. Measure the inseam distance from Crotch, where the front and back seams meet, point "G" to the bottom of the leg, point "H", at the length you wish to wear bearing in mind whether you wish to cover the boots or shoes.

HALF THIGH



6. HALF THIGH

1. Button up the pants.
2. Lay the garment out on a flat surface.
3. Measure at the crotch seam line – from point “E” as shown on the left image to the outside of the leg, point “F”, parallel to the waist band.




7. OUTSEAM/PANTS LENGTH

1. Button up the pants.
2. Lay the garment out on a flat surface with outseams at both edges. Take care to pull any wrinkles and fullness from the back panel.
3. Measure the distance from the top of the waist band to the bottom of the hem.



8. HALF KNEE

1. Button up the pants.
2. Lay the garment out on a flat surface. Take care to pull any wrinkles and fullness from the back panel.
3. The knee is positioned about 13" from the crotch seam halfway down. Measure the distance between points "N" and "O" as shown in the picture on the left.

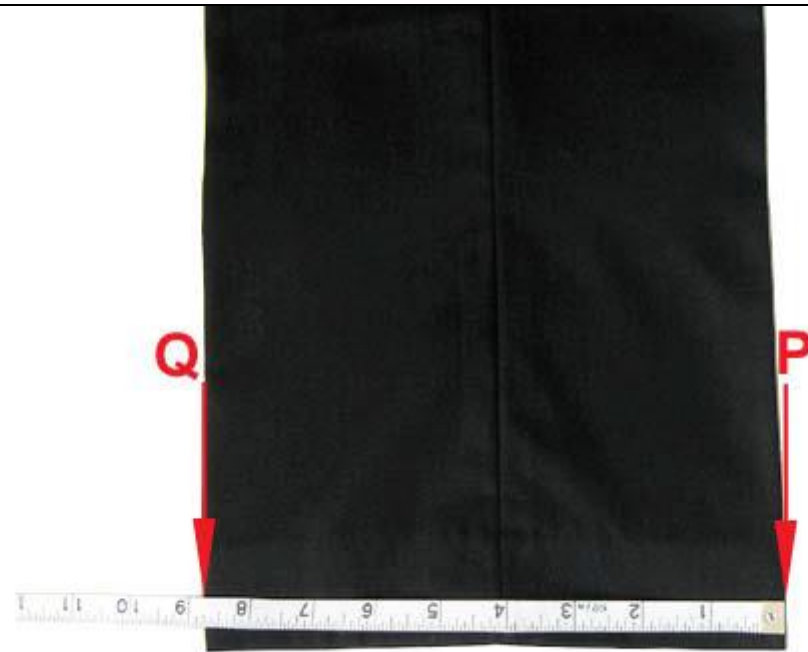

9. HALF HEM/LEG OPENING

1. Lay the garment out on a flat surface.
2. Measure from one side of the leg opening to the other side - from points "P" to "Q" as shown in the picture on the left.

--	--

.....
.....
.....