

Men's Suit – Measure your best fitting suit

Please note that the suit should be laid flat on a table or smooth surface for proper measurement.



1. COLLAR

The collar measurement should be taken from the middle of the button hole to the center of the collar button when the collar is spread flat.




2. JACKET HALF CHEST

Button up the coat and lay it on flat surface. Measure from left edge to right edge just below the sleeves.



3. JACKET HALF WAIST
Button up the coat and lay it on flat surface. Measure from left edge to right edge at the waistline.

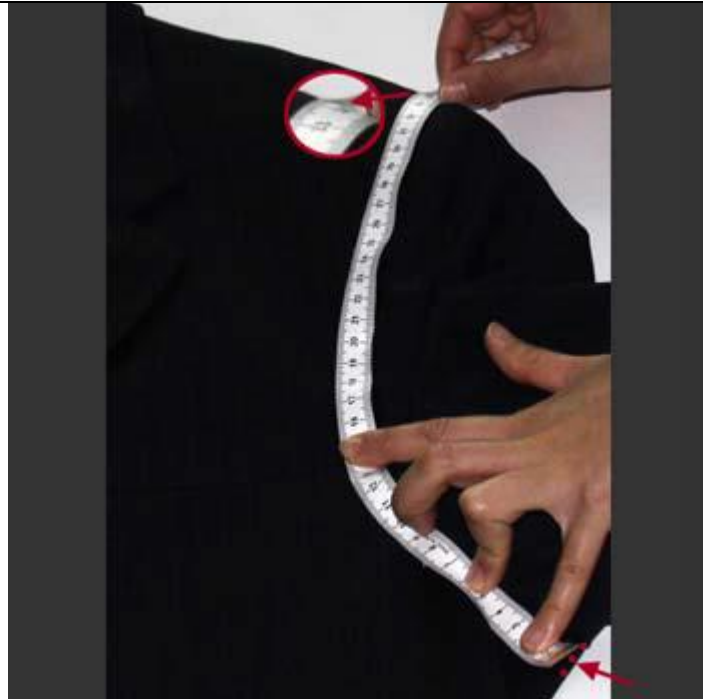

4. JACKET HALF ARMHOLE
With the jacket laid flat, measure from left seam to right seam at the base of the jacket.



5. JACKET HALF GIRTH
Lay coat on flat surface and measure from center back seam across to top of middle (2nd) button to coat edge.



6. YOKE
Lay coat on flat surface and measure shoulders straight across from left shoulder seam to right shoulder seam.



7. SHOULDER

Measure the distance between sleeve and collar along the shoulder seam.



8. JACKET LENGTH (LOWER)

Lay coat on flat surface and measure from outer shoulder seam connecting the sleeves to the bottom.



**9. JACKET LENGTH
(UPPER)**

Lay coat on flat surface and measure from shoulder seam connecting the neck to the bottom.

SLEEVE LENGTH



10. SLEEVE LENGTH

Lay coat on flat surface and measure with the sleeve at your side, from the shoulder's seam all along the arm until the end of the jacket sleeve.



11. SLEEVE WIDTH

Lay the sleeve of the coat on flat surface and measure from one side of the sleeve opening to the other side.



12. SLEEVE INSEAM

Lay coat on flat surface and measure inside seam of coat sleeve from armhole to edge of sleeve. (This is a secondary measurement as we use the "Sleeve Length" as primary reference).



13. BOTTOM HEM WIDTH
Button up the coat and lay it on flat surface. Measure from left edge to right edge at the base of the jacket.



14. HALF BACK WIDTH
Lay coat on flat surface and measure back of coat from where armhole meets the sleeve seam across back to center seam.



15. JACKET BACK LENGTH

Lay coat on flat surface and measure felt under rear collar down the centre back length of coat to bottom.

Suit Pants – Measure your best fitting pants

Please note that the pants should be laid flat on a table or smooth surface for proper measurement.



1. HALF WAIST

1. Button up the pants.
2. Lay the garment out on a flat surface.
3. Measure from one side of the waist to the other.



2. HALF HIPS

1. Button up the pants.
2. Lay the garment out on a flat surface. Take care to pull any wrinkles and fullness from the back panels.
3. Measure the distance between the two hip points "C" & "D" as shown by image on the left.



3. FRONT RISE

1. Button up the pants.
2. Lay the garment out on a flat surface. Take care to pull any wrinkles and fullness from the back panel.
3. Measure from the crotch seam - point "K" as shown in the left image (the point where the inseams meet) to the top of the waistband (point "L").



4. BACK RISE

1. Button up the pants.
2. Lay the garment out on a flat surface. Take care to pull any wrinkles and fullness from the back panel.
3. Measure from the crotch seam- point "K" in the image on the left (the point where the inseams meet) to the top of the waistband (point "M").



5. INSEAM

1. Button up the pants.
2. Lay the garment out on a flat surface.
3. Measure the inseam distance from Crotch, where the front and back seams meet, point "G" to the bottom of the leg, point "H", at the length you wish to wear bearing in mind whether you wish to cover the boots or shoes.

HALF THIGH



6. HALF THIGH

1. Button up the pants.
2. Lay the garment out on a flat surface.
3. Measure at the crotch seam line – from point “E” as shown on the left image to the outside of the leg, point “F”, parallel to the waist band.




7. OUTSEAM/PANTS LENGTH

1. Button up the pants.
2. Lay the garment out on a flat surface with outseams at both edges. Take care to pull any wrinkles and fullness from the back panel.
3. Measure the distance from the top of the waist band to the bottom of the hem.



8. HALF KNEE

1. Button up the pants.
2. Lay the garment out on a flat surface. Take care to pull any wrinkles and fullness from the back panel.
3. The knee is positioned about 13" from the crotch seam halfway down. Measure the distance between points "N" and "O" as shown in the picture on the left.

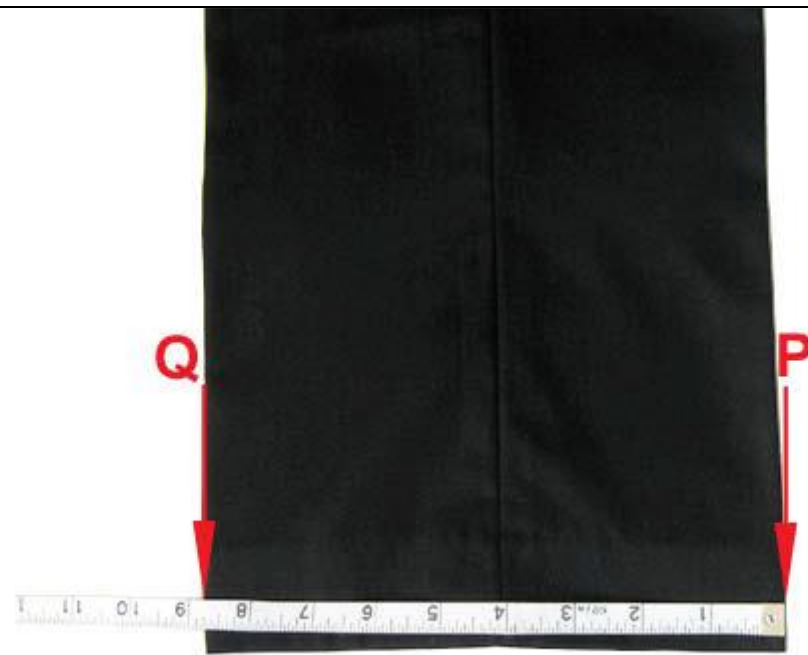

9. HALF HEM/LEG OPENING

1. Lay the garment out on a flat surface.
2. Measure from one side of the leg opening to the other side - from points "P" to "Q" as shown in the picture on the left.

.....
.....
.....